

Max Hi Flow

CONDENSATE REMOVAL PUMP

The best in class Max Hi-Flow tank pump carries on the Aspen Pumps tradition of build quality & high performance. With the lowest dB(A) rating & best IP rating (IP24 splash proof) of any tank pump, the Max Hi-Flow is the quietest & safest pump in its class.



550L/h max. flow


5m max. rec. head
(flow rate 55L/h)

KEY FEATURES

- IP24 - Splash proof
- Easy access tank
- Built in spirit level



SUITABILITY

- Up to 733kW / 2.5m Btu/h
- Ducted units; Floor standing & Chassis units; Cassette units


✓ Perfect for... Large commercial units



1.65 kg


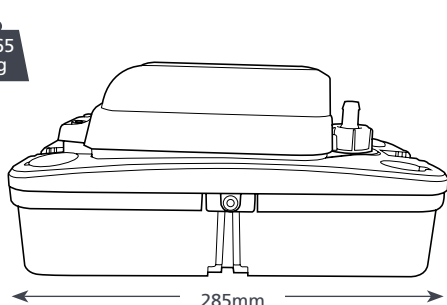


Non-return valve can be cut from 6mm to 10mm (see graphs below)



MAX HI-FLOW (10MM FLOW) @ 230 VAC 50HZ

Max. flow	550L/h @ 0m head
Max. rec. head	5m
Tank capacity	1.5L
dB(A) @ 1m	44
Power supply	230 VAC, 0.7A, 50/60Hz
Rated	Non continuous (5 mins on, 5 mins off)
Class	I appliance
Max. unit output	733kW / 2.5m Btu/h
Max. water temp	40°C / 104°F
Inlet/outlet	x4 21-27mm in, 6 & 10mm out
IP Protection	IP24
Safety switch	3A Normally Closed
Thermal protection	✓

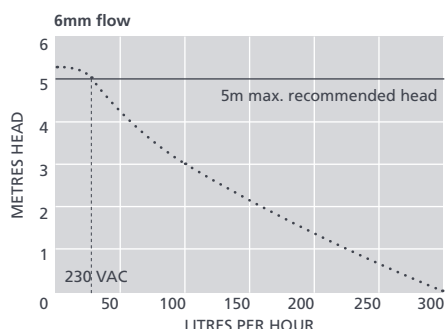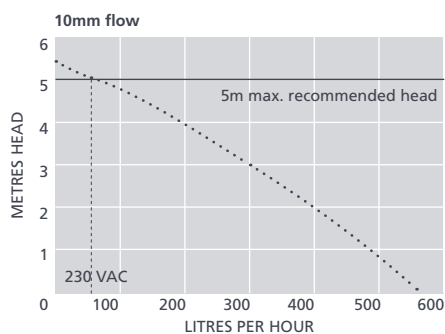

TANK PUMP OPTIONS

MAX Hi-Flow	FP3503
-------------	--------

SUGGESTED XTRA ACCESSORIES

Description	Part No.
Rubber adaptor	FP2013
Rigid pipe 15mm / 3/4"	B7501
Hose to waste	FP2038



For more installation accessories take a look at our Aspen Xtra range

IN THE BOX

Max Hi-Flow tank pump • Fixing kit incl. rod mount and wall mount clips • Install manual



Download manual at aspenpumps.com